

STORMWATER MANAGEMENT DESIGN ASSISTANCE MANUAL

**For Small Projects in
West Lampeter Township, Lancaster County, Pennsylvania**

Small Projects Simplified Approach Application

Application Fee \$125.00

Please submit fee, forms and agreement to the Township prior to installation
of new project.

Updated November 15, 2018

TABLE OF CONTENTS

I.	Introduction	2
II.	Importance of Stormwater Management	2
III.	Standard Terms Used in the Manual	2
IV.	Determining What Type of Stormwater Management Submission is Needed	3
V.	Using the Stormwater Management Worksheets	4
VI.	Disconnected Impervious Area (DIA)	5
VII.	Small Project Stormwater Site Plan Requirements	10
VIII.	Selecting BMPs	10
IX.	Municipal Stormwater Management Worksheets	11
X.	Stormwater Management/ BMP Facilities & Maintenance Agreement	16

I. Introduction:

This design manual has been created as a tool to help property owners manage stormwater on their property and streamline the process of designing on-site stormwater management facilities for small construction projects from 1,000 sq. ft. to 5,000 sq. ft. Through the use of this manual, residents have the ability to determine the appropriate facilities for their property, project and budget. This design method is not intended to be used with large-scale subdivision / land development projects or activities that include infrastructure such as roadways.

The Stormwater Best Management Practices (Stormwater BMPs) listed in this manual should be used as a guide and are not a comprehensive list of options. Residents should contact West Lampeter Township to discuss alternative solutions for site specific applications.

II. Importance of Stormwater Management:

Stormwater is the runoff produced by precipitation, snow melt, or ice melt. When land is developed or changed, the flow patterns of water and quality of water are also changed. Land development activities can affect characteristics of stormwater runoff, including the rate of runoff, volume of runoff, and quality of runoff. When runoff is not managed, the increased volume may aggravate flooding.

The objective of stormwater management is to prevent or mitigate the adverse impacts of the increase in rate and volume of stormwater runoff, while also protecting health, safety, and property. Stormwater BMPs aim to maintain water quality, encourage infiltration in appropriate areas, promote groundwater recharge, maintain the natural drainage characteristics of the site to the maximum extent practicable, and protect stream banks and beds.

III. Standard Terms Used in the Manual:

The terms listed below are specific to the Stormwater Management Design Assistance Manual – Small Projects Simplified Approach

Best Management Practice (BMP) – Activities, facilities, designs, measures, or procedures used to manage stormwater impacts from regulated activities, to meet state water quality requirements, to promote groundwater recharge, and to otherwise meet the purposes of this Ordinance.

Disconnected Impervious Area (DIA) – An impervious or impermeable surface that is disconnected from any stormwater drainage or conveyance system and is redirected or directed to a pervious area, which allows for infiltration, filtration, and increased time of concentration.

Disturbed Area – An unstabilized land area where an earth disturbance activity is occurring or has occurred.

Flow Path – The path that stormwater follows from the discharge point to the nearest property line or channelized flow (i.e. stream, drainage ditch, etc.). The length of the path is measured along the ground slope.

Impervious Surface (Impervious Area) – A surface that prevents the infiltration of water into the ground. Impervious surfaces and areas include but are not limited to roofs, additional indoor living spaces, patios and decks, garages, storage sheds and similar structures, streets, driveways, access drives, parking areas, and sidewalks. Any areas designed to be covered by loose surfacing materials such as gravel, stone and/or crushed stone, and intended for storage of and/or travel by vehicles, or pedestrians shall be considered impervious. Surfaces or areas designed, constructed and maintained to permit infiltration may be considered pervious.

Karst – A type of topography or landscape characterized by surface depressions, sinkholes, rock pinnacles/uneven bedrock surface, underground drainage, and caves. Karst is formed on carbonate rocks, such as limestone or dolomite.

Regulated Activities – Any earth disturbing activities or any activities that involve the alteration or development of land in a manner that may affect stormwater runoff.

Runoff – Any part of precipitation that flows over the land.

Small Projects - Regulated activities that, measured on a cumulative basis from May 12, 2014, create new impervious areas of more than 1,000 square feet and less than 5,000 square feet or involve Earth Disturbance Activity of an area less than 5,000 square feet and do not involve the alteration of stormwater facilities or watercourses.

IV. Determining What Type of Stormwater Management Submission is Needed:

The following chart provides a guide to determine what type of stormwater submission is needed. Some projects will be exempt from preparing a stormwater management plan, but documentation of the project must still be filed with the West Lampeter Township. Completion of the West Lampeter Township **Stormwater Management Worksheets** will determine what type of documentation is required for each project.

This manual is designed to assist those with projects that qualify as a Small Project (more than 1,000 square feet but less than 5,000 square feet of impervious area). If a formal Stormwater Management Plan is required in accordance with the West Lampeter Township Stormwater Management Ordinance, **please consult a qualified person (ex. Engineer, Surveyor).**

Stormwater Management Ordinance Status	Proposed New Impervious Area	Next Steps
Exempt per Section 230-51	Up to 1,000 ft ²	File Municipal application for exemption in the form set forth in Attachment A-1
Small Project per Definition	Greater than 1,000 ft ² to ≤ 5,000 ft ²	Prepare a Small Project Plan per Section 230-52
Non-Exempt	Greater than 5,000 ft ²	Prepare a SWM Site Plan per Article IV

V. Using the Stormwater Management Worksheets:

Determining the new impervious area of a proposed project is the first step in using this Manual. Completing the attached West Lampeter Township Stormwater Management Worksheets will assist the property owner, or applicant, and West Lampeter Township in determining the impervious area of a proposed project and providing guidance through ensuing steps.

Step 1: Step 1 of the West Lampeter Township Stormwater Management Worksheet provides a table and directions on how to figure out the new impervious area proposed to be created. If the total new impervious area is less than or equal to 1,000 square feet, the project may qualify as an Exemption. The owner will sign the Acknowledgement at the top of the sheet and file it with West Lampeter Township. West Lampeter Township will use this as a record of exempt projects and keep a running total of proposed impervious area since May 12, 2014.

Step 2: Step 2 of the West Lampeter Township Stormwater Management Worksheet provides a process to determine the Disconnected Impervious Area (DIA). If any new impervious area can be disconnected in accordance with the standards expressed in this Manual, please provide the appropriate documentation to support the Disconnected Impervious Area calculations. The owner will sign the Acknowledgement at the top of the sheet and file it with West Lampeter Township. West Lampeter Township will use this as a record of exempt projects and keep a running total of proposed impervious area since May 12, 2014. If the total new impervious area is still greater than 1,000 square feet and less than or equal to 5,000 square feet after applying any Disconnected Impervious Area Credits, applicants will continue to Step 3.


Step 3: Step 3 of the West Lampeter Township Stormwater Management Worksheet provides guidance to determine the total volume of stormwater from new impervious surfaces that must be controlled using stormwater BMPs. This step involves calculating the volume of stormwater that can be controlled by planting new deciduous and / or evergreen trees, and the volume of stormwater that must be controlled using other BMP measures. Upon completion of these calculations, continue to Step 4.

Step 4: Step 4 of the West Lampeter Township Stormwater Management Worksheet provides guidance regarding the preparation of a Minor Stormwater Site Plan, as outlined in this Design Manual, for approval by West Lampeter Township. This includes determining the types, sizes, and location of proposed Stormwater BMPs to be employed for a given project. The worksheets, Minor Stormwater Site Plan, and Owner Acknowledgement will be brought to West Lampeter Township for approval. West Lampeter Township will use this submission as a record to keep a running total of proposed impervious area since May 12, 2014, and to monitor the installation of the required Stormwater BMPs necessary to support the project.

VI. DISCONNECTED IMPERVIOUS AREA (DIA):

When impervious surface areas like rooftops and paved areas are directed to a pervious area that allows for infiltration, filtration, and increased time of concentration, the impervious surface areas may qualify for Disconnected Impervious Area (DIA) Crediting.

- **Rooftop Disconnection:** A rooftop can be considered for DIA Crediting if it meets the requirements listed below. Please note no more than 25% of the required capture volume can be mitigated through the use of Disconnected Impervious Area Crediting.
- The overland flow path from roof runoff discharge point has a positive slope of five percent (5%) or less.
- The length of the overland flow path is greater than 75 feet.
- Soils along the overland flow path are not classified as hydrologic group “D”, i.e. infiltration is at least 1 inch per 24-hour day.
- The receiving pervious area shall not include another person’s property.

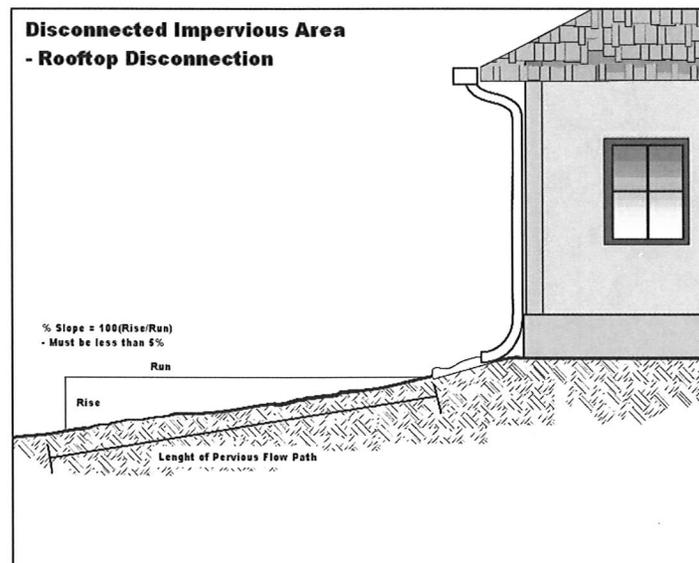

Determining Status of Rooftop DIA:

Step 1: Determine contributing area of the roof to each disconnected discharge (downspout).

Step 2: Determine the length of down slope pervious flow path available for each disconnected discharge.

Step 3: Determine the % slope of the pervious flow path, % slope = (rise/ run) x 100. Must be 5% or less.

Step 4: See the Partial Rooftop Disconnection table to determine the percentage of the area that can be treated as disconnected. If the available length of the flow path is equal to or greater than 75 ft, the discharge qualifies as entirely disconnected.

Partial Rooftop Disconnection		
Length of Pervious Flow Path* (ft) Lots 10,000 ft ² and Under	Length of Pervious Flow Path* (ft)	Roof Area Treated as Disconnected *
0 – 7.9	0 – 14	0%
8 – 15.9	15 – 29	20%
16 – 22.9	30 – 44	40%
23 – 29.9	45 – 59	60%
30 – 34.9	60 – 74	80%
35 or more	75 or more	100%

* Pervious flow path must be at least 15 feet from any impervious surface and cannot include impervious surfaces.

* Please note no more than 25% of the required capture volume can be mitigated through the use of Disconnected Impervious Area Crediting.

Other Impervious Surface Disconnection: When runoff from other impervious surfaces is directed to a pervious area that allows for infiltration, filtration, and increased time of concentration, the contributing impervious surface may qualify as disconnected. Other impervious surfaces include all non-rooftop surfaces, including but not limited to driveways, parking areas, walkways, porches, and decks. With regard to driveways, parking areas, and walkways, this analysis applies to only small or narrow facilities. Features such as commercial parking lots or commercial entrance / circulation drives shall not be included in this analysis. Other impervious surfaces can be considered for the Disconnected Impervious Area Credit if they, or the adjacent areas, meet the following requirements. Please note no more than 25% of


the required capture volume can be mitigated through the use of Disconnected Impervious Area Crediting:

- The contributing flow path over the impervious area is not more than 75 feet.
- The length of overland flow is greater than or equal to the maximum length of flow over the impervious area.
- The slope of the contributing impervious area is five percent (5%) or less.
- The slope of the overland flow path is five percent (5%) or less.
- If discharge is concentrated at one or more discrete points, no more than 1,000 ft² may discharge to any one point. In addition, a gravel strip or other spreading device is required for concentrated discharges. For non-concentrated discharges along the entire edge of paved surface, a level spreader is not required; however, there must be provisions for the establishment of vegetation along the paved edge and temporary stabilization of the area until the vegetation is established.

REFERENCE: Philadelphia Water Department. 2006 & 2011. Stormwater Management Guidance Manual. Section 4: Integrated Site Design. Philadelphia, PA.

Example Project: The following example determines the status of DIA for a proposed 936 ft² garage.

This example meets the Disconnected Impervious Area Crediting criteria to be exempted up to the maximum 25% from the Small Project volume requirements of the West Lampeter Township Stormwater Management Ordinance.

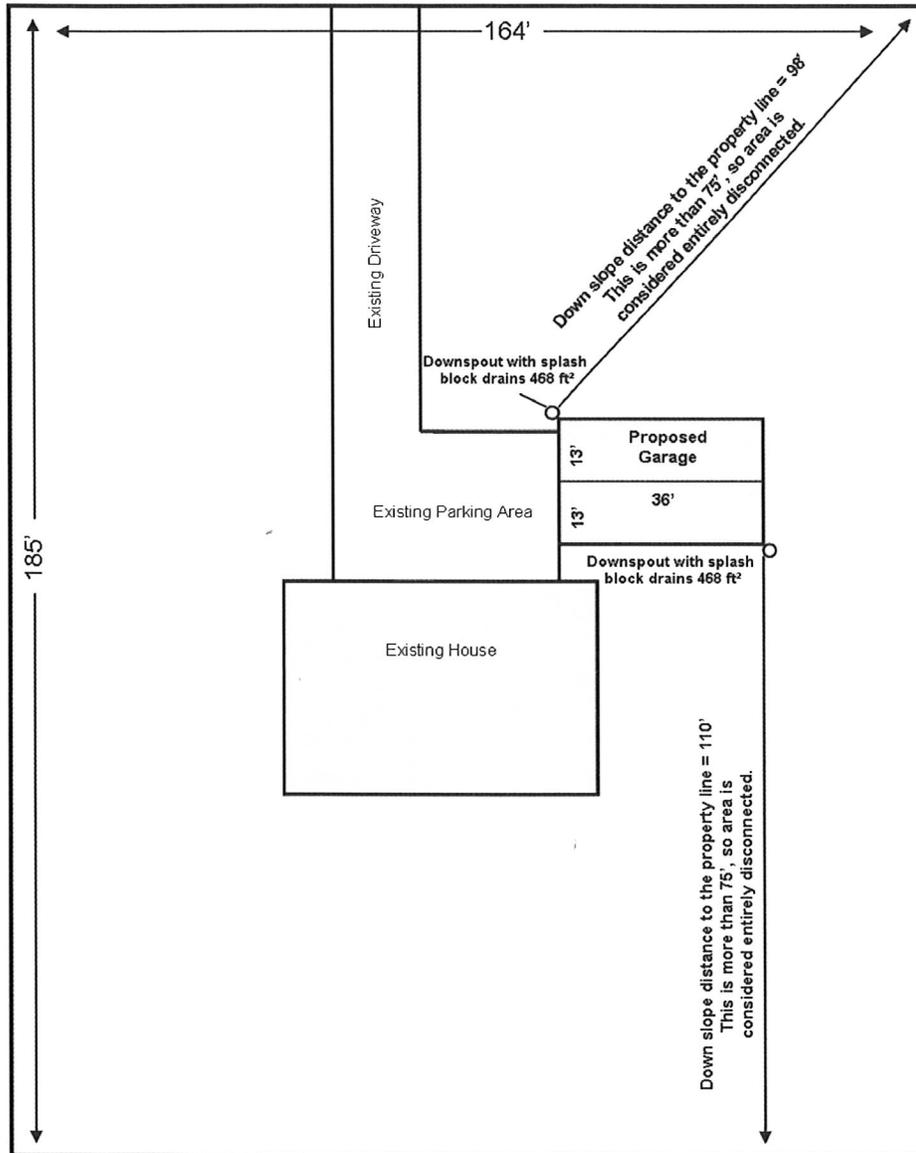

Step 1: Determine the area to each disconnected discharge. The area draining to each downspout is 468 ft² for a total of 936ft².

Step 2: The discharge on the north side of the garage has a 98 ft pervious flow path available. The south discharge has 110 ft pervious flow path available.

Step 3: The rise of the north discharge is 2 ft and the run is 75 ft for a slope of 2.6%. This is 5% or less so it qualifies. For the south discharge the rise is 4 ft and the run is 100 ft equaling a slope of 4%. This is 5% or less, so it qualifies.

Step 4: Both of these discharges have pervious flow paths greater than 75 ft, so they qualify for the DIA Credit. They are able to DIA Credit a maximum of 25% of the total square footage of the project, which equals 234ft². The applicant is still required to manage the remaining square footage with a stormwater control of their choosing.

VII. Small Project Stormwater Site Plan Requirements

A Small Project Stormwater Site Plan depicts the existing conditions of a property and the location of proposed impervious surfaces. Depicting the relationship between the proposed activities and distances to things like property lines, streams, and vegetated areas will help determine if the stormwater runoff created by the proposed project can be managed naturally within the property or if additional Stormwater BMPs are needed to accommodate the stormwater runoff.

If a project requires the submission of a Minor Stormwater Site Plan, the applicant may prepare and submit to West Lampeter Township a Small Project Stormwater Site Plan and the West Lampeter Township Stormwater Management Worksheet. The Lancaster County GIS Office can provide assistance to applicants to obtain property maps of existing features. A Minor Stormwater Site Plan depicting the key features of the site must be drawn to scale and show the following:

- Property boundary.
- Site conditions (grassed areas, agricultural fields, direction of slope and stormwater flow on the property).
- Location of all existing and proposed structures (house, shed, addition, etc.) and any proposed downspouts. Include the dimensions of proposed structures.
- Distance from proposed downspouts to property line.
- All existing and proposed driveways and other impervious areas (stone and gravel driveways are considered impervious).
- Natural features such as streams, wetlands, tree lines and other vegetation on the property and within 50 feet of the property line for lots smaller than 5 acres.
- Distance from proposed structures or downspouts along the stormwater flow path to any stream or wooded area.
- Any other pertinent information that may be significant to the project site (existing drainage ways, steep slopes, etc.).
- Wells and on-site septic systems.

If Stormwater BMPs are required, the following information must also be shown on the plan:

- Location and size of proposed Stormwater BMPs.

Other Considerations for Minor Stormwater Management Plans:

- While soil testing is not mandatory for Minor Stormwater Management Plans, soil testing is highly recommended to select and apply the appropriate Stormwater BMPs. The use of soil maps, infiltration tests, and/ or perc tests may provide the applicant basic information about soil characteristics.
- Proposed stormwater management facilities must be designed to handle flows from the contributing area.
- The site shall not have any pre-existing stormwater drainage-related problems (as verified by West Lampeter Township), at the discretion of West Lampeter Township.
- Water quality shall be protected per Chapter 93 of PA Code.
- West Lampeter Township may inspect all Stormwater BMPs during and after construction / installation.
- Infiltration BMPs should not be constructed nor receive runoff until the entire contributory drainage area has achieved final stabilization.
- Ensure that infiltration in geologically susceptible areas such as, but not limited to, carbonate geology / karst topography do not cause adverse effects. The Minor Stormwater Site Plan should incorporate steps to ensure that salt or chloride will not contaminate the groundwater.
- Selected Stormwater BMPs shall be designed, constructed, and maintained in accordance with the manufacturer's recommendation, the *Guide to Choosing Stormwater BMPs*, as may be updated or amended (see Appendix C of the Lancaster County Stormwater Management Plan), the *PA Stormwater Management BMP Manual*, or other written guidance acceptable to West Lampeter Township.
- Proposed sump pumps shall discharge to infiltration or vegetative Stormwater BMPs to the maximum extent practicable.

VIII. Selecting Stormwater BMPs

If the submission of a Small Project Stormwater Management Plan including the use of Stormwater BMPs is required, the applicant should review the compiled information in the *Guide to Choosing Stormwater BMPs*, as may be updated or amended (see Appendix C of the Lancaster County Stormwater Plan), as taken from the *PA Handbook of Best Management Practices for Developing Areas* and the *PA Stormwater Management BMP Manual*. These documents identify Stormwater BMPs that have been deemed to be of a nature and cost that will accomplish the goals of the West Lampeter Township Stormwater Ordinance, while not unduly burdening the residents. It will then be the Owner's responsibility to select a facility, determine the appropriate size and agree to construct and maintain that facility or facilities. The property owner is encouraged to utilize both multiple and hybrid versions of the facilities, as outlined in the documents mentioned above.

IX. Stormwater Management Worksheets

For West Lampeter Township Use and Record of Project Area

Property Owner's Name _____

Address of Property _____

Parcel ID # _____

Phone Number _____ New Impervious Area Associated with this Project _____

Stormwater Management Submission Type: _____ Small Project
 _____ Stormwater Management Plan

Total New Impervious Area Since Adoption of SWM Plan _____

Acknowledgement - I declare that I am the property owner, or representative of the owner, and that the information provided is accurate to the best of my knowledge. I understand that stormwater may not adversely affect adjacent properties or be directed onto another property without written permission. I also understand that false information may result in a stop work order or revocation of permits. Municipal representatives are also granted reasonable access to the property for review and/ or inspection of this project if necessary.

Signature _____ Date _____

Step 1: Determine the amount of new impervious surface area created by the proposed project. This includes any new impervious surface area that prevents infiltration of stormwater into the ground. New stone and gravel areas are considered impervious. Impervious surface areas existing before May 12, 2014 are not included in this calculation. Use additional sheets if necessary.

Calculate new impervious area by completing this table.

Surface	Length (ft)	x	Width (ft)	=	Impervious Area (ft ²)
Buildings		x		=	
Driveway		x		=	
Parking Areas		x		=	
Patios/ walkways		x		=	
Other		x		=	
Total Proposed Impervious Surface Area (Sum of all impervious areas)					

- If the total new impervious surface area is **less than or equal to 1,000 ft²**, the project is eligible to be exempted from the requirement to submit a Small Project Stormwater Site Plan or a SWM Site Plan. Sign Acknowledgement and file this sheet with West Lampeter Township.
- If total new impervious surface area is **greater than 1,000 ft², and less than or equal to 5,000 ft²**, continue to Step 2.
- If the total new impervious surface is **greater than 5,000 ft²** then a Stormwater Management Plan shall be submitted in accordance with the West Lampeter Township Stormwater Management Ordinance.

Step 2: Determine Disconnected Impervious Area (DIA). All or parts of new impervious surfaces may qualify as Disconnected Impervious Area if runoff is directed to a pervious area that allows for infiltration, filtration, and increased time of concentration. The volume of stormwater that needs to be managed could be reduced through DIA.

Rooftop Disconnection Criteria

- Overland flow path from the discharge area or impervious area has a positive slope of 5% or less.
- Soils are not classified as hydrologic soil group “D”
- The receiving pervious area shall not include another person’s property unless written permission has been obtained from the affected property owner.

Paved Disconnection Criteria: Other impervious surfaces (driveways, walkways, porches, decks, etc.) and gravel can be considered disconnected if it meets the criteria above and:

- The length of overland flow is greater than or equal to the contributing flow path.
- The slope of the contributing impervious areas is 5% or less.
- If discharge is concentrated at one or more discrete points, no more than 1,000 ft² may discharge to any one point. In addition, a gravel strip or other spreading device is required for concentrated discharges. Non-concentrated discharges along the entire edge of paved surface must include provisions for the establishment of vegetation along the paved edge and temporary stabilization of the area until the vegetation is established.
- If these criteria can be met, you may credit up to 25% of your Disconnected Impervious Area.

Partial Rooftop Disconnection		
Length of Pervious Flow Path (ft) Lots ≤ 10,000 ft ²	Length of Pervious Flow Path (ft)	DIA Credit Factor
35 or more	75 or more	0.75
30 – 34.9	60 – 74	0.75
23 – 29.9	45 – 59	0.75
16 – 22.9	30 – 44	0.75
8 – 15.9	15 – 29	0.8
0 – 7.9	0 - 14	1.0
*Pervious flow path must be at least 15 feet from any impervious surface		
* No more than 25% of the required capture volume can be mitigated through the use of Disconnected Impervious Area Crediting.		

Using the calculations from Step 1, complete the table below. This will determine the impervious area that may be excluded from the area that needs to be managed through stormwater BMPs. The maximum impervious area that may be disconnected is 25%.

Surface	Proposed Impervious Area	x	DIA Credit	=	Impervious Area (ft ²) to be Managed
Buildings (area to each downspout)		x		=	
Driveway		x		=	
Parking Areas		x		=	

Patios/ walkways		X		=	
Other		X		=	
Total Proposed Impervious Surface Area to be managed (Sum of all impervious areas)					

- If the total new impervious surface area is **greater than 1,000 ft² and less than or equal to 5,000 ft²** continue to Step 3 to calculate the remaining .
- If the total new impervious surface area is **greater than 5,000 ft²** and cannot be disconnected, the project may not be submitted with a Small Project Stormwater Site Plan. Discontinue this worksheet and prepare a SWM Site Plan in accordance with Article IV of the West Lampeter Township Stormwater Management Ordinance.

Step 3: Calculate the volume of stormwater runoff created by new impervious surfaces. Use the following chart to determine this volume.

Impervious Area (ft ²) to be Managed (Sum of Step 2)	X	1.0 in/12 in = 0.083	=	Amount of Stormwater to be Managed (ft ³)
	X	0.083	=	

Step 4: Determine the techniques to be used to manage the stormwater volume calculated in Step 3 and prepare the Small Project Stormwater Management Plan. Use the following information to determine the BMPs to be used to manage the proposed stormwater volume.

Where permitted by West Lampeter Township, planting of new trees may be used to manage a portion of the proposed stormwater volume. First, calculate the cubic feet of stormwater that can be managed by planting new trees. If the criteria below can be met, planting of new trees can be used to manage a portion of the proposed stormwater volume:

Deciduous Trees = 6 ft³ per tree Evergreen Trees = 10 ft³ per tree

Criteria:

- Trees must be PA native species (See PA Stormwater BMP Manual for a list)
- Trees shall be a minimum 1" caliper tree and 3 feet tall shrub (min)
- Trees shall be adequately protected during construction
- No more than 25% of the required capture volume can be mitigated through the use of trees
- Dead trees shall be replaced by the property owner within 12 months
- Please consider the specifications for each tree species when determining location and spacing

Amount of Stormwater to be Managed (ft ³) (Sum of Step 3)	-	Tree Planting Credit (ft ³)	=	Amount of Stormwater to be Managed (ft ³)
	-		=	

Subtract the stormwater volume that can be managed by tree planting from the overall stormwater volume calculated in Step 3. The remaining cubic feet of stormwater must be managed through the installation of properly sized Stormwater BMPs. Select BMPs and size according to the volume of stormwater that needs to be managed.

Alternatively, stormwater BMPs may be sized using the following Simple BMP Sizing table.

(Source: Lycoming County Planning Department)

BMP Type		Simple BMP Sizing - Amount New Impervious Area to be Managed (ft ²)											
		250	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000
Bioretention	Ex. Rain garden, Vegetated swale	21 ft ³ or	42 ft ³ or	62 ft ³ or	83 ft ³ or	125 ft ³ or	166 ft ³ or	208 ft ³ or	249 ft ³ or	291 ft ³ or	332 ft ³ or	374 ft ³ or	415 ft ³ or
	Ex. Dry well, Infiltration trench	53 ft ³	105 ft ³	155 ft ³	208 ft ³	313 ft ³	415 ft ³	520 ft ³	623 ft ³	728 ft ³	830 ft ³	935 ft ³	1,038 ft ³

[NOTE: Table revised to reflect 1 inch of runoff volume; infiltration volume based on Bioretention volume divided by 0.4]

The Simple BMP Sizing table is used as follows. After subtracting the stormwater volume that can be managed through the planting of new trees, match the remaining stormwater volume to the “Amount of New Impervious Area to be Managed” in white boxes in the table (rounding **up** to the next value if the number is between two values). Then look in the light grey box to determine the required size of the type of Stormwater BMP (bioretention or infiltration) being considered. For example, 1,000 square foot of new impervious surface area could be accommodated by an 83 cubic foot bioretention system. Bioretention systems such as a 13’x 13’x 1.5’ rain garden or a 36’x 2’x 3.5’ vegetated swale could be used to achieve this storage volume.

Once the sizing of necessary stormwater BMPs has been determined, prepare the necessary information required by the Small Project Stormwater Site Plan and submit to West Lampeter Township for review and approval. Bring the worksheets, BMP information (size, location, etc.), Owner Acknowledgement, and BMP Facilities and Maintenance Agreement (if applicable) to West Lampeter Township.

If an area greater than 5,000 square feet of earth is disturbed, an erosion and sedimentation (E & S) control plan must be prepared. West Lampeter Township may require that the E&S plan be submitted to, reviewed, and approved by the Lancaster County Conservation District prior to approval of the Small Project Stormwater Site Plan.

OWNER ACKNOWLEDGMENT

- Development activities shall begin only after West Lampeter Township approves the Small Project Stormwater Site Plan.
- The installed Stormwater BMPs will not adversely affect any property, septic systems, or drinking water wells on this or any other property.
- If, after approval of the Small Project by West Lampeter Township, the applicant wishes to pursue alternative stormwater management measures in support of the project, the applicant will submit revised Small Project information and worksheets to West Lampeter Township for approval. If a site requires a more complex system or if problems arise, the applicant may need the assistance of a licensed professional engineer, landscape architect or surveyor.
- The applicant acknowledges that the proposed Disconnected Impervious Area and/or Stormwater BMPs will be a permanent fixture of the property that can not be altered or removed without approval by West Lampeter Township.

I (we) _____, hereby acknowledge the above statements and agree to assume full responsibility for the implementation, construction, operation, and maintenance of the proposed stormwater management facilities. Furthermore, I (we) also acknowledge that the steps, assumptions, and guidelines provided in this submission, including but not limited to the Small Project Stormwater Site Plan, the West Lampeter Township Stormwater Worksheet, and the Stormwater Management / BMP Facilities and Maintenance Agreement (if applicable) will be adhered to.

Applicant Acknowledgement of Submission

Signature: _____ Date: _____

West Lampeter Township Acknowledgement of Receipt

Signature: _____ Date: _____
Title: _____

X. STORMWATER MANAGEMENT / BMP FACILITIES AND MAINTENANCE AGREEMENT

STORMWATER MANAGEMENT/ BMP FACILITIES AND MAINTENANCE AGREEMENT

THIS AGREEMENT, made and entered into this ____ day of _____, 20____, by and between _____ hereinafter called the “Landowner,” and West Lampeter Township, Lancaster County, Pennsylvania, hereinafter called the “Township.”

WHEREAS, the Landowner is the owner of certain real property described as (Lancaster County Tax Map / Parcel Identification Number) _____ as recorded by deed in the land records of Lancaster County, Pennsylvania, Book _____ Page _____, hereinafter called the “Property”;

WHEREAS, the Landowner is proceeding to build on and develop the property; and

WHEREAS, the Small Project Stormwater Site Plan, which is expressly made a part hereof, as approved or to be approved by the Township, provides for detention of stormwater within the confines of the property through the use of Stormwater Best Management Practices (Stormwater BMPs); and

WHEREAS, The Township and the Landowner, its successors and assigns, agree that the health, safety, and welfare of the residents of the Township, require that on-site Stormwater BMPs be constructed and maintained on the Property; and

WHEREAS, The Township requires that on-site Stormwater BMPs as shown on the Small Project Stormwater Site Plan be constructed and adequately maintained by the Landowner, its successors and assigns. Any additional requirements imposed by the Township are considered part of the Small Project Stormwater Site Plan.

NOW, THEREFORE, in consideration of the foregoing premises, the mutual covenants contained herein, and the following terms and conditions, the parties hereto agree as follows:

1. The Landowner in accordance with the specifications identified within the Small Project Stormwater Site Plan shall construct the onsite Stormwater BMPs.
2. The Landowner, its successors and assigns, shall adequately maintain the Stormwater BMPs. This includes all pipes and channels built to convey stormwater to the facility, as well as all structures, improvements, and vegetation provided to control the quantity and quality of the stormwater. Adequate maintenance is herein defined as good working condition so that these facilities are performing their design functions.
3. The Landowner, its successors and assigns, shall inspect the Stormwater BMPs after all rainfall events exceeding one inch of precipitation in a 24-hour period.

4. The Landowner, its successors and assigns, hereby grant permission to the Township, its authorized agents and employees, to enter upon the Property without prior notification at reasonable times and upon presentation of proper identification to inspect the Stormwater BMPs whenever the Township deems necessary.

5. In the event the Landowner, its successors and assigns, fails to maintain the Stormwater BMPs as shown on the Small Project Stormwater Site Plan and in good working condition, the Township may enter upon the Property and take whatever action is deemed necessary to maintain said Stormwater BMPs and to charge the costs of such repairs to the Landowner, its successors and assigns. This provision shall not be construed to allow the Township to erect any structure of permanent nature on the land of the Landowner unless such structures were part of the approved Small Project Stormwater Site Plan. It is expressly understood and agreed that the Township is under no obligation to routinely maintain or repair said facilities, and in no event shall this Agreement be construed to impose any such obligation on the Township.

6. In the event that the Township, pursuant to this Agreement, performs work of any nature, or expends any funds in performance of said work for labor, use of equipment, supplies, materials, and the like, the Landowner shall reimburse the Township within thirty (30) days of receipt of invoice for all expenses incurred. The Township has the right to file a municipal lien for unpaid costs and expenses that have not been reimbursed thirty (30) days after receipt of invoice.

7. The intent and purpose of this Agreement is to ensure the proper maintenance of the Stormwater BMPs by the Landowner. This Agreement shall not be deemed to create any additional liability of any party for damage alleged to result from or be caused by nonpoint source pollution runoff. This Agreement imposes no liability of any kind whatsoever on the Township and the Landowner agrees to hold the Township harmless from any liability in the event the Stormwater BMPs fail to operate properly. In the event that a claim is asserted against the Township, its designated representatives or employees, the Township shall promptly notify the Landowner and the Landowner shall defend, at his own expense, any suit based on the claim. If any judgment or claims against the Township shall be allowed, the Landowner shall pay all costs and expenses regarding said judgment.

8. This Agreement shall be binding to the Landowner, its administrators, executors, assigns, heirs and any other successors in interests, in perpetuity.

Landowner:

Signature: _____
Printed Name: _____

Date: _____

West Lampeter Township:

Signature: _____
Printed Name: _____
Title: _____

Date: _____